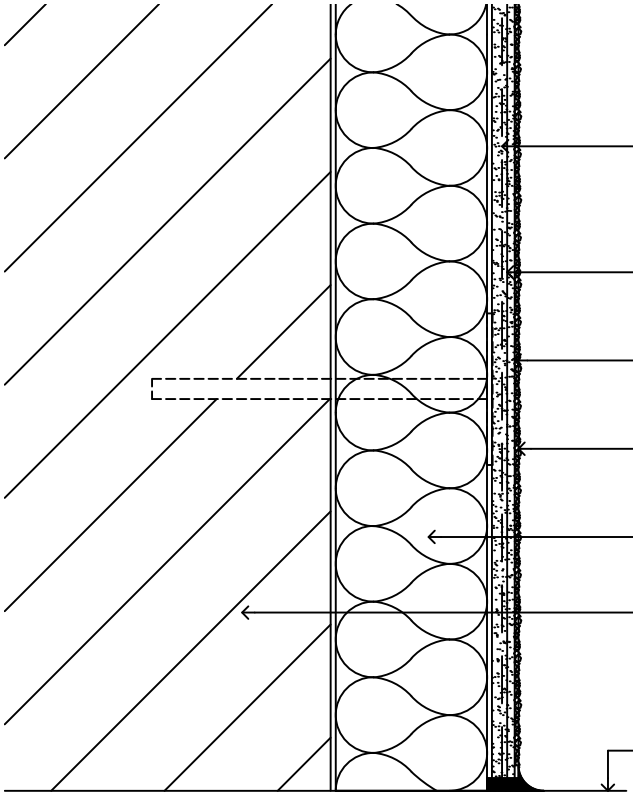

WBS scrim adhesive coat 4-6mm min reinforced with alkali resistant glass fibre reinforcing mesh

WBS scrim adhesive levelling coat 2-3mm min finished smooth

WBS Epsicoat primer

WBS Epsicoat mineral render plus

WBS approved insulation board (thickness to suit client requirements)

Existing substrate

Pipe

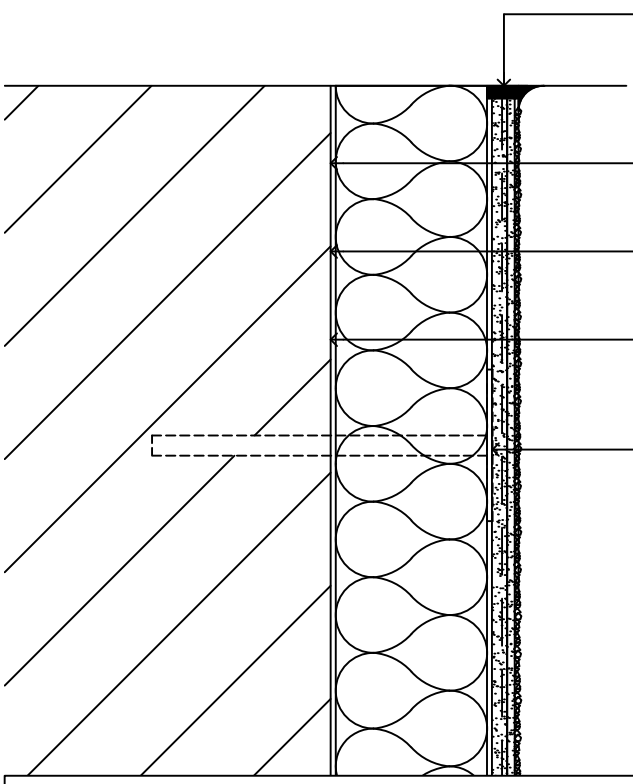

WBS EVO-STIK silicone sealant installed between pipe and render system

WBS fungicidal wash to be applied as specified

WBS bonding agent to be applied as specified

WBS bedding adhesive to be applied as specified

WBS approved mechanical fixing

drawing. Pipe detail

date. July 2015 revision. R3 drawn by. RC scale. nts

drawing no. **EWI-EMRPLUS-18**

wetherby
creating a greener future
1 Kid Glove Road, Golborne Enterprise Park,
Golborne, Greater Manchester, WA3 3GS
Tel: 01942 717100 Fax: 01942 717101
Web: www.wbs-ltd.co.uk
E-mail: technical@wbs-ltd.co.uk

© WBS-LTD 1998-2015. All rights reserved